



## FEATURES

The LDM 210 is compact, non contact dosimeter reader and low cost

- No directional alignment required
- Indicator lamps for operation and access control
- Manageable digital inputs/outputs
- DSP based digital process
- Compatible with DMC 2000 and SOR families
- Compatible with software packages: DOSICARE, DOSIFAST, DOSIMASS and LDM 3000

## LDM 210 RS 232 Dosimeter Reader

The LDM 210 reader operates using software packages installed on computer (PC) and communicates with the dosimeters of the DMC 2000 and SOR family in pass-by data exchange mode.

Associated to the DOSICARE or DOSIFAST software, the LDM 210 reader is used as an interface to activate a dosimeter (to switch in counting mode) or to deactivate it (to switch in pause mode).

Associated to the DOSIMASS software, it is used as an interface to read and write the internal data of the dosimeter.



health physics

A Mirion Technologies Division

Featuring:



## DESCRIPTION

- Two-color electroluminescent diode used as ON/OFF and data exchange indicator lamp
- Two-color electroluminescent diode for READY/BUSY indication
- Two-color electroluminescent diode for ACCESS/NO ACCESS indication
- SUBD 9 - pin female connector for RS232 data link
- JACK connector 5.5 x 2.1 mm (0.21 x 0.08 in) for DC power supply
- 2 HE10, 2 x 7- pin male connectors for 4 digital inputs and 4 digital outputs
- Software downloadable and saved in flash

## ELECTRICAL CHARACTERISTICS

- **Universal power supply supplied:**
  - Input: 90 to 265 VAC- 47 to 63 Hz
  - Output: 9 V DC
  - delivered with interchangeable US and Europe mains plug
- Consumption: typical 100 mA under 9 V
- Option (on request, please consult us):
  - Power supply by 2AAA 1,5 V batteries
  - Autonomy on batteries: typical 10 hours

## MECHANICAL CHARACTERISTICS



- Length: 110 mm (4.33 in)
- Width: 65 mm (2.56 in)
- Thickness: 28 mm (1.10 in)
- Weight: 110 g (3.88 oz)



**MIRION** Health Physics  
TECHNOLOGIES Division

Mirion Technologies (MGPI) Inc  
5000 Highlands Parkway  
Suite 150  
Smyrna Georgia 30082  
USA  
T +1.770.432.2744  
F +1.770.432.9179


Mirion Technologies (MGPI) SA  
BP 1  
F-13113 Lamanon  
France  
T +33 (0) 4 90 59 59 59  
F +33 (0) 4 90 59 55 18

Mirion Technologies (RADOS) Oy  
P.O. Box 506  
FIN-20101 Turku  
Finland  
T +358 2 468 4600  
F +358 2 468 4601

Mirion Technologies (RADOS) GmbH  
Ruhstrasse 49  
DE-22761 Hamburg  
Germany  
T +49 (0) 40 851 93-0  
F +49 (0)40 851 93 256

www.mirion.com  
144496EN-B

## Ethernet network

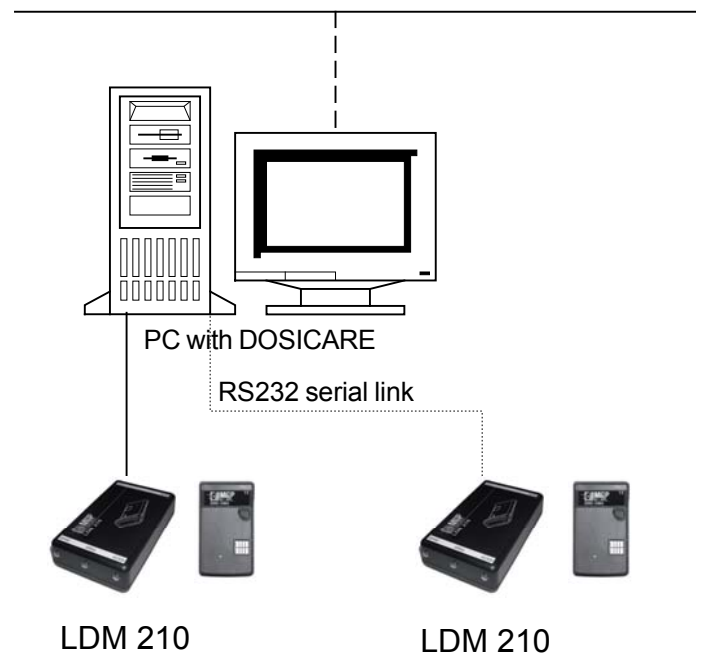

## ENVIRONMENTAL CHARACTERISTICS

- Operating temperature: 0°C to +50°C (32°F to 122°F)
- Storage temperature: -10°C to +60°C (+14°F to 140°F)
- Humidity: 90% HR (without condensation)

## COMMUNICATION WITH DOSIMETERS

- Short range high frequency bidirectional data exchange
- Nominal range: between 20 and 30 cm (7.87 and 11.81 in)